




Projectors... and more!

EIP-2600

XGA DLP® Projector 2600 ANSI Lumens

KEY FEATURES: Model EIP-2600

- 2600 ANSI Lumens, 80% uniformity, and 2200:1 contrast ratio.
- True XGA resolution. SXGA+ through VGA and MAC compatible.
- Smart data compression / expansion, and video scaling.
- DVI-I input supports digital data, plus digital video w/HDCP.
- Accepts Composite, S, and Component Video, both 4:3 and 16:9.
- Compatible with HD input resolution up to 1080i/p.
- Convenient manual zoom (1.15X) and focus lens.
- Built-in image offset. Vertical digital keystone correction.
- Power Management and Eco mode help prolong lamp life.
- Selectable menu position and timeout. Auto input selection.
- Wireless remote control.
- 3 Year* Projector Warranty!

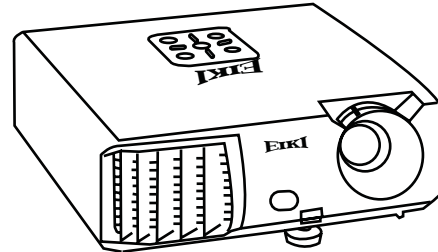

EIP-2600

Included Accessories: Quick Start Guide. Owner's Manual on CD. AC Power Cord. Lens Cover. VGA type Computer Input Cable (Dsub 15~Dsub 15). Component Video Input Cable (Dsub 15~3-RCA). RS-232 Control Adapter (DIN~Dsub-9). Wireless Remote Control & Batteries (AA x 2).

Optional Accessories: Replacement Lamp. Mouse Cable (USB-A ~ USB-B). Ceiling Mount. Ceiling Post and Plate. Carry Case.

SPECIFICATIONS: Model EIP-2600

Screen Brightness	up to 2600 ANSI Lumens	Video: Formats Supported.....	Normal 4:3 and Wide Screen 16:9
Illumination Uniformity	80%	Video: Image Sizing.....	Video Scaling Technology
Size of Color Palette	16.7 Million	Signal Inputs:	
Contrast Ratio	2200:1	Digital Computer / Digital Video w/HDCP.....	DVI-I x 1
Projection Lamp	230 Watt UHP	(Analog Computer/Component Video via optional adapters).....	Dsub 15 x 1
Estimated Lamp Life	up to 4000 Hours of Use	Analog Computer / Component Video (via optional adapter) Dsub 15 x 1	
Imaging System.....	0.55" in. DMD DLP® x 1	S Video:.....	S-Video x 1
Screen Pixels	1024x768 in stripe configuration	Composite video	RCA x 1
Total Pixels	786,432 ((1024x768) x 1)	Audio Input	RCA x 2
Lens Type	Manual Zoom and Focus	Audio Input.....	Ministereore x 1
Lens Specs.....	Speed: f:2.5~2.6; FL: .0.803~0.925in. (20.4~23.5 mm)	Signal Outputs:	
Lens Ratio	Zoom Max:Min: 1.15:1; Throw:Width: 1.64~1.97:1	Computer / Component.....	Dsub15 x 1
Image Diagonal	40~300 in. (101.6~762 cm)	Audio output	Ministereore x 1
Image Width	2.6~20 ft. (0.79~6.1m.)	Sound System - Amplifier	2 Watt (Mono)
Throw Distance (tele ~ wide)	4.92 ~ 36.7 ft. (1.5~11.2 m.)	Sound System - Speakers	1.1 in. (2.8 cm) x1
Front Elevation	up to 8° up	Fan Noise	as low as 29 dBA
Anti Keystone	Image starts 15.5% of image height above lens center	Cabinet Size (HxWxD).....	3.5 x 10.6 x 10.4 in. (89 x 270 x 265 mm.)
Vertical Keystone Correction	Digital: up to 40° up or down	Weight	6.4 lbs. (2.9kg)
Scanning Frequency	Auto: H Sync. 15-110kHz; V Sync. 45-85Hz	Packaged Size (H x W x D)....	10.0 x 14.8 x 15.0 in (255 x 375 x 382 mm)
Dot Clock	12~170 MHz	Packaged Weight	13.2 lb. (6.0 Kg)
Image Orientation	Normal, Reversed, Inverted	Power Requirements.....	100-240V AC, 50/60Hz
Local Control / Power Management	Full Function / Auto Shut-Off	Power Consumption	up to 303 W
Remote Control w/Mouse	Wireless (Infra Red) x 1	Heat.....	up to 1140 BTU (287 KC)
RS-232 Control Port	Mini DIN-9 x 1	Power Cord.....	6' (1.8 M) Type 3, Detachable
Mouse (Page Up/Down)	USB Type B x 1	Electrical Safety Compliance	UL / cUL
Computer Native Resolution	1024x768 (XGA)	Electromagnetic Compatibility	FCC Class A, CE Mark
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA, VGA & MAC	Security Facilities.....	Kensington® Security Slot
Computer: Formats.....	1400 x 1050 through 640x480	UPC	4571194672336
Computer: Higher Resolutions	Displayed panned or Smart Compressed	Operating Temperature.....	41~95°F (5~35°C)
Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	User Maintenance	Replace Lamp
Video: HD Compatibility.....	480i/p, 540p, 576i/p, 720p, 1035i, 1080i/p	Warranty (to the original end-use customer)	
Computer: Lower Resolution	Displayed normal or Smart Expanded	Projector:	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
		Lamp:	90 Days (Failed Lamp Replaced Pro-Rata)
			* Whichever occurs first

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2009 Eiki International, Inc. Issued January 1, 2009.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com
Visit our World Wide Web site: <http://www.eiki.com>