

DRM 4000

8-IN-2 AUDIO MIXER & ROUTER



DYNACORD




The DRM 4000 rack mixer offers 8 audio inputs and 8 output channels allowing monaural 2-channel operation. Employed in a PROMATRIX system the DRM 4000 configuration both units are connected via remote control functions, preset switching and routing. Used as stand-alone unit the DRM 4000 also fulfills many tasks.

Areas Of Use

- Mixer for the sound reinforcement in conference rooms, multi purpose halls, event venues, gastronomy applications, houses of worship, etc.
- Employed in a PROMATRIX system, e.g. for connecting several sound sources and microphones with priority function and mixing ability.
- Employed in small paging systems.
- Integrated in media control systems.

Features

- 4 MIC/LINE input channels: XLR, electronically balanced, transformers are optionally available. Level controls on the front panel, Pad switch + Gain control + Phantom power switch on the rear panel, internally configurable High-Pass filter.
- 4 AUX input channels: 2 RCA-type connectors each, Level controls on the front panel.
- Sound controls (LO/Hi) in all input channels, front panel controls are accessible through the use of a screwdriver.
- Signal / Peak LEDs (green / red) for monitoring the input levels of each input channel.
- All inputs can be freely assigned/mixed to the outputs. Controlling the DRM 4000 is possible from a DPM 4000 via remote interface connection, via control contacts or directly from a PC via optional RS-232 interface.
- Direct outputs for monitoring the MIC/LINE and AUX channels, which can be internally configured for pre or post listening. The audio signals are present via Phoenix-type connectors on the rear panel.
- Connectors on the front panel: 1 MIC/LINE input (XLR) and 1 AUX input (2 x RCA-type connectors); sockets are parallel-wired to MIC/LINE1 and AUX1.
- Priority control (ducking function) for two microphone channels MIC1 and MIC2. External contacts, the level of the audio signal (via threshold control on the front panel) or the remote signal can be used to trigger the ducking function. Active-Indication-LEDs on the front panel.

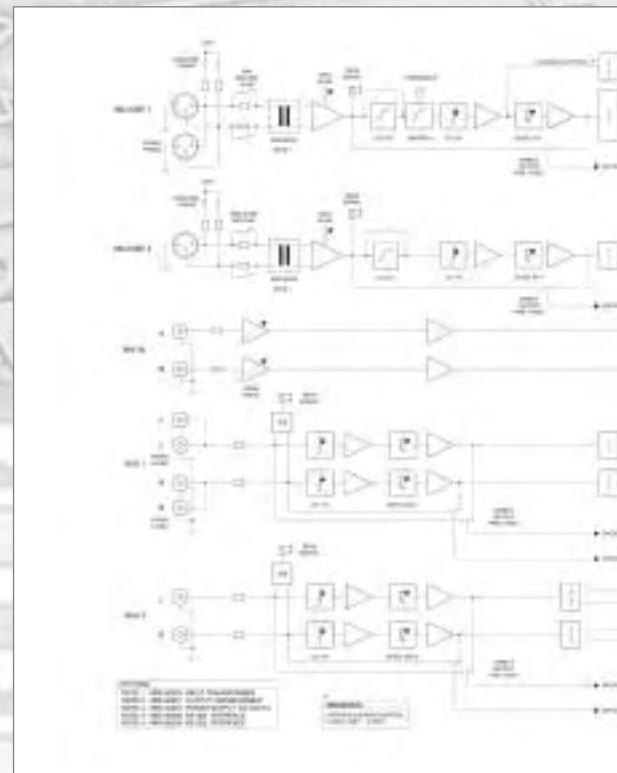




and 2 audio outputs. The inputs are configured as 4
 out channel can be assigned to either one or both
 ation as well as stereo operation.

D) can be used in series with the DPM 4000. In this
 interface which provides the possibility for priority

s smaller sound reinforcement and paging system

- Microphone channels MIC1 and MIC2 employ limiters with internally adjustable threshold.
- 2 audio outputs: XLR, electronically balanced, transformers are optionally available. Separate master controls on the front panel.
- Separate LED-chain level meters for each output channel on the front panel.
- Internal VCAs for both output channels. Connection facility for external volume control (remote control of the master outputs). Control via serial interface (PC, DPM 4000, media control).
- MIX IN input for external signal feeds / stacking: 2 x RCA-type connectors, unbalanced. Level controls on the rear panel.
- Send output for recording / stacking: 2 x RCA-type connectors, unbalanced.
- ON-LED on the front panel.
- Remote control via external contacts: ducking MIC1 / MIC2, preset switching, routing.
- Optional: RS-485 control from the DPM 4000.
- Optional: RS-232 control directly from a PC.
- 24V power supply; 100 - 240 VAC power supply adapter is optionally available.
- Power-ON delay: delayed switching via relay prevents power-ON / OFF noise.
- Enclosure: 19" / 1HU.

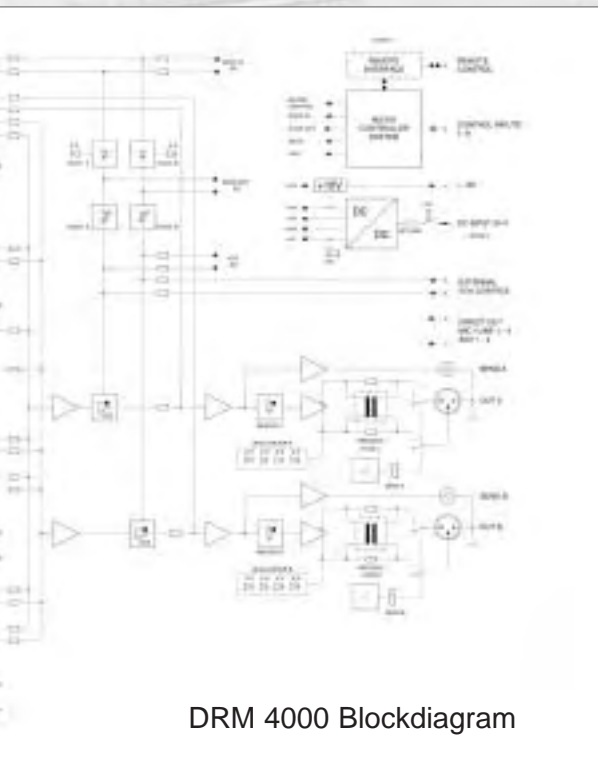

DRM 4000 Blockdiagram

RS-232 Interface (optionally available)

- Direct control of all routing possibilities via PC.
- Output level control via VCA.
- Configuration and storage of presets as well as preset switching via PC.
- Interface facility to connect to media control.

RS-485 Interface (optionally available)

- Controlling all routing possibilities from a DPM 4000 via macros.
- Ducking control from a DPM 4000 via macros.
- Output level control via VCA.
- Configuration and storage of presets via the PROMATRIX Designer software.
- Preset switching via DPM 4000.

Control Contact Interface

- 8 freely configurable control inputs (e.g. for preset switching, ducking control, muting, priority switching).
- 2 VCA control inputs A / B for remote volume control via external potentiometers.





| | |
|--|--|
| Supply Voltage | 24 V DC (19 ... 32 V DC) |
| Nom. Power Consumption (24 V) | 700 mA |
| Max. Power Consumption (24V) | 975 mA |
| <hr/> | |
| Audio Inputs | 4 x MIC/LINE, 4 x AUX, 1 x MIX IN |
| MIC/LINE Inputs | XLR-type sockets, electronically balanced, transformers optionally available |
| Nom. Input Level | MIC: -60 .. -10 dBu / 0.8 mV .. 245 mV LINE: -30 .. +20 dBu / 25 mV .. 7.75 V |
| Max. Input Level | MIC: +11 dBu / 2.75 V LINE: +30 dBu / 24.5 V |
| Input Impedance | MIC: 3.6 k ohms LINE: 10 k ohms |
| Limiters, Effective Range | -10 dBu .. +20 dBu |
| Common Mode Rejection | CMRR 50 dB |
| AUX Inputs | 2 x RCA-type, unbalanced |
| Nom. Input Level | -6 dBu or +4 dBu / 390 mV or 1.23 V, internally configurable |
| Max. Input Level | +15 dBu or +25 dBu / 4.4 V or 13.8 V |
| Input Impedance | > 19 k ohms |
| MIX Input | 2 x RCA-type, unbalanced |
| Nom. Input Level | 0 dBu / 775 mV |
| Max. Input Level | +21 dBu / 8.7 V |
| Input Impedance | 22 k ohms |
| <hr/> | |
| Audio Outputs | |
| MASTER OUT A/B | XLR-type sockets, electronically balanced, transformers optionally available |
| Nom. Output Level | 0 dBu / 775 mV |
| Max. Output Level | +21 dBu / 8.7 V |
| Output Impedance | < 120 ohms |
| Nom. Load Impedance | 600 ohms |
| SEND | 2 x RCA-type, unbalanced |
| Nom. Output Level | 0 dBu / 775 mV |
| Max. Output Level | +21 dBu / 8.7 V |
| Output Impedance | < 100 ohms |
| DIRECT OUT | Phoenix Micro-Combicron terminal strip, unbalanced |
| Nom. Output Level | 0 dBu / 775 mV |
| Max. Output Level | +21 dBu / 8.7 V |
| Output Impedance | < 100 ohms |
| <hr/> | |
| Frequency Response | 20 Hz - 20 kHz (- 1.0 dB) |
| Dynamic Range | > 100 dB |
| Distortion (THD) MIC/LINE | 0.03 % |
| Distortion (THD) AUX | 0.01 % |
| Sound Control Effectivity LO/Hi | 60 Hz / 13 kHz \pm 15 dB |
| LO CUT Filter | 85 Hz / -3 dB |
| <hr/> | |
| Environmental Temperature | 5° - 40° C |
| <hr/> | |
| Dimensions (WxHxD) | 19" (483 mm) x 1HU (43,6 mm) x 351 mm |
| Weight | 4.7 kg / 10.4 lbs |
| <hr/> | |
| Extensions | NRS 90233 Input Transformer (121 682) NRS 90227 Output Transformer (121 679) NRS 90257 Power Supply Unit (121 789) NRS 90256 RS-485 Interface (121 785) NRS 90258 RS-232 Interface (121 790) |

USA Telex Communications Inc., 12000 Portland Ave. South, Burnsville, MN 55337, Phone: +1 952-884-4051, FAX: +1 952-884-0043
Germany Telex EVI Audio, Hirschberger Ring 45, D 94315, Straubing, Germany, Phone: 49 9421-706 0, FAX: 49 9421-706 265
U.K. Shuttle Sound, The Willow Centre, Willow Lane, Mitcham GB • Survey • Phone: +44 20 864 671 14, FAX: +44 20 864 075 83
France EVI France S. A., Parc de Courcerin, Allee Lech Walesa, Lognes, f-77185 Marne La Vallee, France, Phone: 33/1-6480-0090, FAX: 33/1-6006-5103
Australia EVI Audio (Austl.), Unit 23, Block C, Slough Business Estate, Silverwater N.S.W. 2128, Australia, Phone: 61/2-9648-3455, FAX: 61/2-9648-5585
Hong Kong EVI Audio Limited, Unit E & F, 21/F, Luk Hop Industrial Bldg., 8 Luk Hop St., San Po Kong, Kowloon, Hong Kong, Phone: 852-2351-3628, FAX: 852-2351-3329
Japan EVI Audio Japan, Ltd., 5-3-8 Funabashi, Setagaya-ku, Tokyo, 156-0055 Japan, Phone: 81-3-5316-5020, FAX: 81-3-5316-5031
Singapore Telex Communications, 3015A Ubi Rd 1, 05-10, Kampong Ubi Industrial Estate, Singapore 408705, Phone: 65-746-8760, FAX: 65-746-1206
Mexico Av. Parque Chapultepec #66-201, Naucalpan Edo. Mex. 53390, Phone: (52) 5358-5434, FAX: (52) 5358-5588
Africa Mid-East Telex EVI Audio, Hirschberger Ring 45, D 94302, Straubing, Germany, Phone: 49 9421-706 0, FAX: 49 9421-706 265
Latin America Telex Communications Inc., 12000 Portland Ave. South, Burnsville, MN 55337, Phone: +1 507 526 3205, FAX: +1 507 526 3059

www.dynacord.de