

EIP-5000

XGA Conference DLP® Projector 5200 ANSI Lumens

- ▼ 5200 ANSI Lumens bright, at 90% uniformity, and a 1200:1 contrast ratio.
- ▼ XGA resolution. UXGA, SXGA+, SXGA, SVGA, VGA & MAC compatible.
- ▼ DLP® imaging technology delivers a “seamless” high contrast image.
- ▼ Power Zoom and Focus Lens. Optional Wideangle and Telephoto lenses.
- ▼ Horizontal & Vertical Lens Shift. H, V & Geometric Keystone Correction.
- ▼ Dual Lamp System provides redundancy and permits 4 brightness levels.
- ▼ Wireless/wired remote. Computer mouse control. 8-power digital zoom.
- ▼ RS-232 System and Network Control Compatible: Built in DB9 and RJ45.
- ▼ Smart data compression/expansion, and video scaling. sRGB Compatibility.
- ▼ Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- ▼ Converts Interlace video to Progressive scan. 2-3 Pulldown Support.
- ▼ Accepts Analog and Digital (DVI w/HDCP) Video input signals.
- ▼ Power Management, Keylock Security, and Custom Warmup Screen options.
- ▼ Unique Projector Stack Control and VideoWall Signal Division features.
- ▼ 3 Year* Projector Warranty!




*Get the film-like imaging of DLP® technology
in a projector with conference room brightness
and built-in network control.*

EIKI
Projectors... and more!

EIP-5000

5200 ANSI Lumens

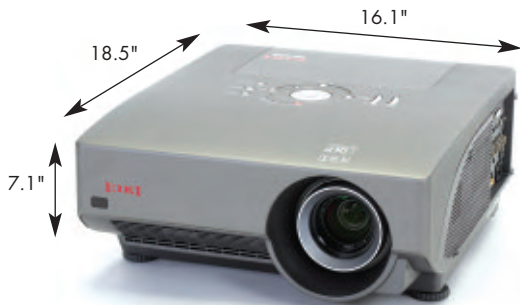

Hg Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to the laws in your jurisdiction.



INCLUDED ACCESSORIES:

Printed Quick Setup Guide and Owner's Manual. Quick Setup Guide, Owner's Manual and CAD Drawings on CD ROM. 12 ft (3.6 M) AC Power Cord. Lens Cover. 9.8 ft (3 M) VGA-type Computer Input Cable. Wireless/wired Remote with Mouse Control & 2 x AA batteries. Remote Mouse Receiver on 5.25 ft (1.6M) USB-A cable.

OPTIONAL ACCESSORIES:

Replacement Lamps. Soft Carry Bag with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. Wideangle and Telephoto Lenses. Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control.

EIKI

Projectors... and more!

Specifications subject to change without notice.
©2007 EIKI International, Inc. Printed in the USA. 07/15/07

SPECIFICATIONS: EIP-5000

| | |
|--|--|
| Screen Brightness | up to 5200 ANSI Lumens |
| Illumination Uniformity | 90% |
| Size of Color Palette | 16.7 Million |
| Contrast Ratio | 1200:1 |
| Horizontal Resolution | 750 TV Lines (HDTV) |
| Projection Lamp | 260 Watt UHP x 2 |
| Estimated Lamp Life | up to 2500 Hours of Use |
| Imaging System | 0.7" DDR DLP® Single DMD™ |
| Color System | 4-segment, 3X speed color wheel |
| Screen Pixels | 786,432 (1024 x 768) in stripe configuration |
| Lens Type | Power Zoom and Focus |
| Lens Specs | Speed: f:1.8~2.0; Fl: 1.01~1.23 in. (25.6~31.3 mm) |
| Lens Ratios | Zoom Max:Min: 1.22:1; Throw:Width: 1.8~2.2:1 |
| Image Diagonal | 40~500 in. (102~1270 cm) |
| Image Width | 2.5~33.3 ft. (0.81~10.16 m) |
| Throw Distance | 4.8~44 ft. (1.5~13.4 m) |
| Front Elevation/Maximum Pitch | up to 9° up |
| Vertical Anti Keystone | Power Lens Shift (Top:Bottom) 10:0~1:1 |
| Horizontal Anti Keystone | Power Lens Shift (L:R-R:L) 6.5:3.5~3.5:6.5 |
| Vertical Keystone Correction | Digital: up-to 30° up or down |
| Horizontal Keystone Correction | Digital: up-to 30° left or right |
| Geometric Keystone Correction | Digital |
| Scanning Frequency | Auto: H Sync. 15-126 kHz; V Sync. 43-200 Hz |
| Dot Clock | 12~230 MHz |
| Image Orientation | Normal, Reversed, Inverted |
| Local Control/Power Management | Full Control/Auto Shut-Off |
| Remote Projector & Mouse Control | Wireless/Wired x 1 |
| Computer Mouse Control | via External IR Receiver on USB-A cable |
| Wired Remote Port | MiniStereo x 1 |
| RS-232 Port | DB9 x 1 |
| LAN Port | RJ45 x 1 |
| Computer Native Resolution | 1024 x 768 (XGA) |
| Computer: Compatibility | UXGA, SXGA+, SXGA, WXGA, XGA, SVGA, VGA, MAC & Workstation: SUN, SGI |
| Computer: Formats | 1600 x 1200 through 640 x 480 |
| Computer: Image Sizing | Normal, or Smart Compressed or Expanded |
| Video: Color Systems | NTSC/PAL/SECAM/NTSC 4.43/PAL-M/N |
| Video: Aspect Ratios Supported | 4:3 and 16:9 |
| Video: Image Resizing | Video Scaling Technology |
| Video: Resolutions Supported | |
| SDTV (Composite, S-Video, Component) | 480i, 540p, 576i |
| EDTV (DVI w/HDCP) | 480p, 576p |
| HDTV (DVI w/HDCP) | 720p (50/60), 1035i (50/60), 1080i (50/60) |
| Signal Inputs: | |
| 1. Computer: HD15 x 1 Analog RGB plus Audio: Stereo: MiniStereo x 1 (L & R) either Computer: BNC x 5 (RGBHV) or Video: BNC x 5 (RGBHV) or BNC x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr) plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 3) | |
| 3a. either Computer - Digital RGB: DVI-D x 1 or Video - Digital HDCP: (same) DVI-D x 1 plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 2) | |
| 3b. Video : Composite - RCA x 1 plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 5) | |
| 4. Video : S-Video - S-Video x 1 plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 4) | |
| 5. Video : S-Video - S-Video x 1 plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 4) | |
| Signal Outputs: | |
| Data/Video Monitor | HD15 x 1 on Input 1 (shared: Input 1 & 2) |
| Audio: Line | Stereo: MiniStereo x 1 (L & R) (follows video) |
| Audio: Amplifier | Stereo: 3 Watts |
| Audio: Built In Speakers | Stereo: 1.3 in. (3.3 cm) diameter (round) x 2 |
| Operating Noise | as low as 35 dBA |
| Cabinet Size (HxWxD) | 7.1 x 16.1 x 18.5 in. (180 x 410 x 471 mm) |
| Overall Size (HxWxD) | 7.6 x 16.2 x 18.5 in. (193 x 412 x 470 mm) |
| Weight | 32.7 lb. (14.83 kg) |
| Packaged Size (HxWxD) | 15.4 x 22 x 24.4 in. (390 x 560 x 620 mm) |
| Packaged Weight | 46.3 lb. (21 kg) |
| Power Requirements | 100-240V AC, 50/60Hz |
| Power Consumption: | up to 650 W |
| Heat: | up to 2,218 BTU/hr (559 Kcal/hr) |
| Power Cord | 11.8' (3.6M) Type 3, Detachable |
| Safety Compliance | UL/cUL |
| Security Facilities | Kensington® Security Slot |
| Operating Temperature | 41~104°F (5~40°C) |
| User Maintenance | Clean Air Vents/Covers, Replace Lamps |
| Warranty: (to the original end-use customer) | |
| Projector: | 3 Years/6000 Hour Use*(Parts & Labor to Correct Defects) |
| Lamp: | 90 Days (Failed Lamp Replaced Pro-Rata) * Whichever occurs first |

Talk to your EIKI Dealer... the "pro" in projectors.



Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130
Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada, 310 First St.-Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

<http://www.eiki.com>