

SPECIFICATIONS

PR™ Sub



Frequency range (-10 dB, half space):

45 Hz to 3 kHz

Sensitivity (1 Watt/1 meter):

97 dB

Power rating (program):

300 Watts

Power capacity (peak):

600 Watts

Transducer complement:

Heavy-duty 15" woofer with 2 3/8" voice coil and 50 oz. magnet.

Nominal impedance:

8 Ohms

Input connections:

Two 1/4" phone jacks in parallel

Enclosure materials and finish:

Injection-molded, 1/4" thick polypropylene with textured finish; dark gray color

Dimensions (H x W x L):

28.562" x 21.312" x 17"

72.55 cm x 54.13" 43.18 cm

Width in rear: 11.5" {29.21 cm}

Weight:

42 lbs. (19.1 kg)

Mounting or suspension:

- ▲ Molded-in stand mounting cup, top and bottom flying point inserts

Bullets:

- 15" heavy-duty woofer with 2 3/8" voice coil and 50 oz. magnet
- 300 Watts program/600 Watts peak power handling
- Lightweight trapezoidal enclosure
- Durable, plastic, injection-molded enclosure
- Heavy duty steel grille
- Molded-in pole mount
- Top and bottom flying point inserts

Description

The PR Sub is a subwoofer for sound reinforcement consisting of a heavy-duty 15" woofer in a vented enclosure.

The lightweight-yet-rugged injection-molded plastic



SPECIFICATIONS PR™ Sub

enclosure with molded-in stand-mount cup facilitates portable use for augmenting the bass for live music, DJ use or speech. A black powder-coated steel grille provides driver protection and a professional appearance.


The PR Sub speaker system is rated at 300 Watts program power handling, and the woofer features a 2 3/8" diameter voice coil and a 50 oz. magnet for excellent long term reliability. Two 1/4" phone jack input connectors make hook-up and daisy-chaining to other speakers a breeze.

3 + 2 YEAR LIMITED WARRANTY

NOTE: For details, refer to the warranty statement. Copies of this statement may be obtained by contacting Peavey Electronics Corporation, P.O. Box 2898, Meridian, Mississippi 39301-2898.

PR 15 Input Plate

PR SUB




DESIGNED AND MADE IN U.S.A.

MAX POWER: 300W PROGRAM

IMPEDANCE: 8 OHMS
CROSSOVER FREQUENCY 140 HZ

WARNING: THIS SPEAKER SYSTEM CAN PERMANENTLY DAMAGE HEARING! USE EXTREME CARE SETTING MAXIMUM LOUDNESS

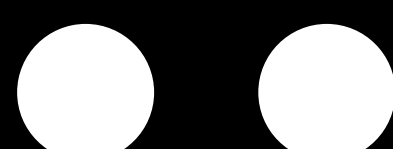

LOW PASS INPUTS
IN PARALLEL

CE

DANGER

BEFORE ATTEMPTING TO SUSPEND THIS SPEAKER CONSULT A CERTIFIED STRUCTURAL ENGINEER. SPEAKER CAN FALL FROM IMPROPER SUSPENSION, RESULTING IN SERIOUS INJURY AND PROPERTY DAMAGE. DO NOT SUSPEND OR MOUNT ANY OTHER PRODUCT OR DEVICE FROM THIS ENCLOSURE! USE ONLY GRADE 5 HARDWARE OR BETTER.



80305072

Features and specifications subject to change without notice.

Peavey Electronics Corporation • 711 A Street • Meridian • MS • 39301 • (601) 483-5365 • FAX (601) 486-1278 • www.peavey.com
©2003 Printed in the U.S.A. 7/03

