

SPECIFICATIONS SP™ 3



Frequency response, 1 meter on-axis, swept-sine in anechoic environment:
54 Hz to 16 kHz (± 3 dB)

Usable low frequency limit (-10 dB point):
47 Hz

Power handling:
Full range:
600 watts continuous
1,200 watts program
2,400 watts peak

Low frequency section:
500 watts continuous
1,000 watts program
2,000 watts peak

Passive mid/high frequency section:
150 watts continuous
300 watts program
600 watts peak

Sound pressure level, 1 watt, 1 meter in anechoic environment:
Full range:
98.0 dB SPL (2.83 V input)

Low frequency section:
100 dB SPL (2.83 V input)

Mid/high frequency section:
98 dB SPL (2.83 V input)

Maximum sound pressure level (1 meter):

Full range:
126 dB SPL continuous
132 dB SPL peak
Low frequency section:
127 dB SPL continuous
133 dB SPL peak
Passive mid/high frequency section:
120 dB SPL continuous
126 dB SPL peak

Radiation angle measured at -6 dB point of polar response:
90° horizontal by 40° vertical

The vertical main polar lobe is angled down 10° with respect to straight ahead being +10, -30°

Transducer complement:
Low frequency section:
1 x 15" woofer, vented
Black Widow® 1508-8 HE SF BWX

Mid frequency section:
1 x 6.5" pro midrange on an asymmetrical Quadratic Throat CD horn

High frequency section:
1 x .875" exit /51 mm voice coil compression driver

RX™ 22 on an asymmetrical Quadratic Throat CD horn

Box tuning frequency:
Low frequency section: 58 Hz

Crossover frequency (internal passive):
Low frequency – mid frequency
650 Hz
Mid frequency – high frequency
2,100 Hz

Recommended active crossover frequency region and slope:
Low frequency – mid/high frequency:
700 Hz at 12 dB/octave

Time offset:
Low frequency: 0.25 ms
Mid/high frequency: 0.0 ms

Impedance (Z):
Full range:
Nominal: 8.0 Ω
Minimum: 5.2 Ω

Low frequency:
Nominal: 8.0 Ω
Minimum: 6.9 Ω

Passive MF/HF:
Nominal: 8.0 Ω
Minimum: 5.4 Ω

Input connections:
Full range: two 1/4" phone jacks, one Neutrik® four-pin Speakon® jack & one Neutrik NL4 Speakon (bi-amp only)

Enclosure materials and finish:
Aspen hardwood plywood finished in Hammertex™ covering

Mounting provisions:
This unit is not designed for overhead suspension

Built-in SA-1 stand-mount adapter and four large rubber feet on bottom for floor use

Dimensions (H x W x D):
Front:
36.13" x 20.55" x 23.00"
918 mm x 522 mm x 584 mm

Rear:
36.13" x 12.63" x 23.00"
918 mm x 321 mm x 584 mm

Net weight:
105 lbs. (47.6 kg)



SPECIFICATIONS SP™ 3

Features

- Three-way, full-range sound reinforcement system
- RX™22 compression driver with ferrofluid cooling
- 6.5" pro midrange with phase plug and ferrofluid cooling
- 15" BWX Black Widow® 4" VC woofer
- 1,200 watts program, 2,400 watts peak
- Patented Quadratic Throat CD Waveguide™ technology used on midrange and tweeter
- Asymmetrical horn aims the sound down 10° (at the audience, not over their heads)
- Sound Guard™ III tweeter and midrange protection
- Full-range inputs include a Neutrik® Speakon® four-pin jack and two 1/4" phone jacks
- Bi-amp input via four-pin switching Neutrik Speakon
- Trapezoidal aspen hardwood enclosure
- Stand-mount adapter

Description

The new SP3 incorporates the new Black Widow BWX SF woofer as well as two Quadratic Throat CD Waveguides. The SP 3 is a three-way speaker system comprised of the new 15" Black Widow BWX SF series woofer with a Kevlar® impregnated cone, a horn-loaded 6-1/4" pro midrange, and an RX 22 compression driver loaded onto a constant directivity waveguide.

The SP 3 has a trapezoidal-shaped enclosure, which reduces the buildup of standing waves inside the enclosure to minimize mid-bass and mid-range coloration. The enclosure is constructed of aspen hardwood plywood augmented with dual-layered top and bottom panels covered with heavy duty textured black Hammertex™ and reinforced with high-impact plastic corners. A full length, wrap-around perforated steel grille protects the front of the enclosure. An SA-1 stand-mount adapter is incorporated to accommodate a speaker stand.

The three-way system consists of the following driver components: a 15" Black Widow BWX SF series woofer with a Kevlar impregnated cone and dust cap. The woofer

is capable of over 600 watts of continuous power handling (AES Std 2-1984). The woofer can handle a lot of sheer power. The midrange is carried by a 6-1/4" professional-grade, horn-loaded speaker with a phase plug and ferrofluid cooling, providing high articulation for vocals. The high frequencies are handled by a 2" RX 22 titanium diaphragm compression driver utilizing ferrofluid cooling. Both the midrange and the high frequency drivers are coupled to a Quadratic Throat Constant Directivity Waveguide (U.S. Patent #6,059,069) to provide smooth, even response, low distortion and good high frequency dispersion. These horns both have an asymmetrical vertical polar response, aiming the main energy lobe down 10 degrees so it is aimed at the audience instead of over their heads. This reduces ceiling reflections, ensuring greater clarity and gain before feedback. The RX 22 driver features the Radialinear Planar Phase Correction System (U.S. Patent #6,064,745), which provides a smooth and extended high frequency response.

Full-range input connection to the system is made via two 1/4" phone jacks and a four-pin Neutrik in parallel. A four-pin Neutrik switching jack is provided for bi-amping flexibility while maintaining superior signal integrity. The internal passive crossover features the Peavey-exclusive Sound Guard protection circuit for the tweeter and the midrange speaker and an advanced topology crossover with high-performance components to provide high power handling and reliability. Sound Guard provides long- and medium-term driver overload protection without impairing musical transients or dynamics on either the mid-range or the tweeter when the system is used full range or when it is bi-amped. The crossover provides driver roll-off and protection as well as driver EQ for the woofer, mid-range and horn for a clean, clear and smooth response. High-quality, reliable crossover components include polypropylene capacitors and high-current

inductors. The optimal integration of the crossover with the selected drivers results in a smooth frequency response from 54 Hz to 16 kHz.

Despite its compact dimensions, this system can produce very high sound levels and handle 1,200 watts program power, resulting in high articulation and long-term reliability.

Frequency response

This measurement is useful in determining how accurately a given unit reproduces an input signal. The frequency response of the SP 3 is measured at a distance of 1 meter using a 1 watt (into the nominal impedance) swept-sine input signal. As shown in figure 1, the selected drivers in the SP 3 combine to give a smooth frequency response from 54 Hz to 16 kHz.

Power handling

There are many different approaches to power handling ratings. Peavey rates this loudspeaker system's power handling using a full-range form of the AES Standard 2-1984. Using audio band 20 Hz to 20 kHz pink noise with peaks of four times the RMS level, this strenuous test signal assures the user that every portion of this system can withstand today's high technology music. This rating is contingent upon having a minimum of 3 dB amplifier headroom available.

Harmonic distortion

Second and third harmonic distortions vs. frequency are plotted in figures 3 & 4 for two power levels. Ten percent (10%) of rated input power and either one percent (1%) of rated input power or 1 watt, whichever is greater. Distortion is read from the graph as the difference between the fundamental signal (frequency response) and the desired harmonic. As an example, a distortion curve that is down 40 dB from the fundamental is equivalent to 1% distortion.

SPECIFICATIONS SP™ 3

Mounting

This unit is not designed for overhead suspension. The SA-1 stand-mount adapter may be incorporated, and four large rubber feet are included on the bottom for floor use.

Architectural & engineering specifications

The loudspeaker system shall have an operating bandwidth of 54 Hz to 16 kHz. The nominal output level shall be 98.0 dB when measured at a distance of 1 meter with an input of 1 watt. The nominal impedance shall be 8.0 ohms. The maximum

continuous power handling shall be 600 watts, with maximum program power of 1,200 watts, peak power input of at least 2,400 watts and a minimum amplifier headroom of 3 dB. The nominal radiation geometry shall be 90 degrees symmetrical about the center axis in the horizontal plane, and +10, -30 degrees about the center axis in the vertical plane. The outside dimensions shall be 36.13 inches high by 20.55 inches wide by 23.00 inches deep. The weight shall be 105 lbs. The loudspeaker system shall be a Peavey model SP™3.

3 + 2 Year Limited Warranty

NOTE: For details, refer to the warranty statement. Copies of this statement may be obtained by contacting Peavey Electronics Corporation, P.O. Box 2898, Meridian, Mississippi 39301-2898.

Amplitude Response (1W 1m On-Axis)

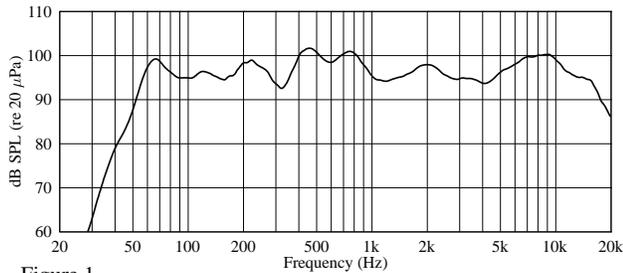


Figure 1

Harmonic Distortion : 1% Rated Power

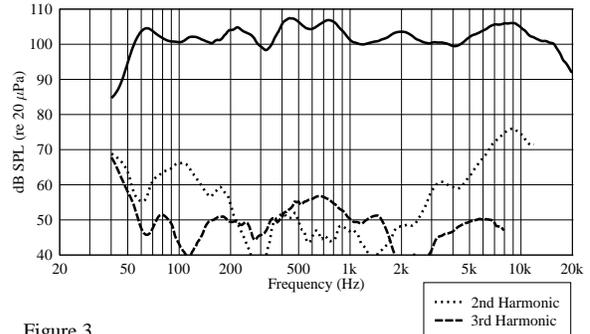


Figure 3

Impedance

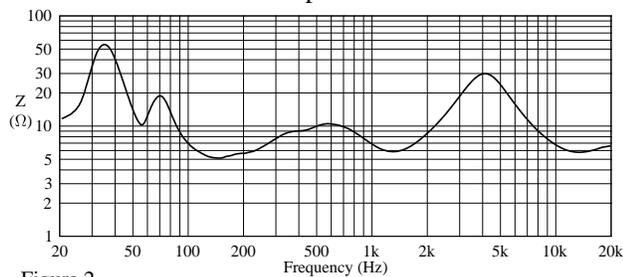


Figure 2

Harmonic Distortion : 10% Rated Power


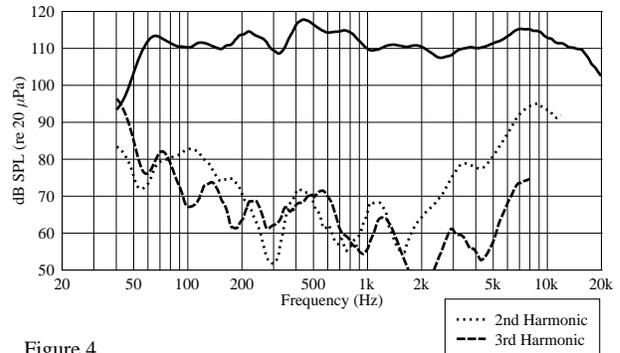


Figure 4

SP 3 Input Plate

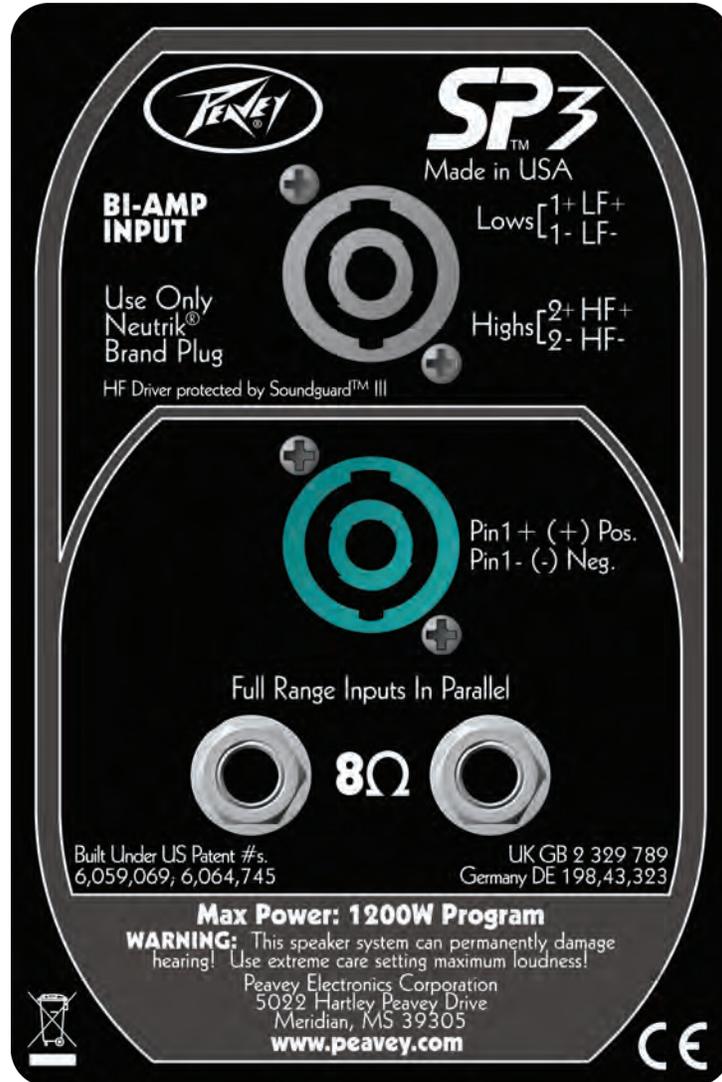

80305551

Features and specifications are subject to change without notice.

Peavey Electronics Corporation • 5022 Hartley Peavey Drive • Meridian, MS 39305 • (601) 483-5365 • www.peavey.com
©2008 Printed in the U.S.A. 03/08

