

ED-X30/ED-X32



EDUCATION PROJECTORS



The Hitachi ED-X30 and ED-X32 are highly compact and affordable 3LCD Projectors. Both deliver high performance, excellent connectivity and impressive functionality. These education projectors come with a market leading range of security features designed to help combat theft in schools.

- 1500 ANSI Lumens with Optical Zoom
- Full Connectivity
- Quick Start and Instant Off
- Auto Vertical Keystone
- Input Source Naming
- My Button
- Low level noise - 29dB
- 7.0W Audio Output
- Whiteboard Mode and Blackboard Mode
- Anti Theft Features:
 - PIN-lock
 - MyScreen Lock
 - Transition Detector
 - Security Bar
 - Kensington Lock



HITACHI
Inspire the Next

ED-X30/ED-X32

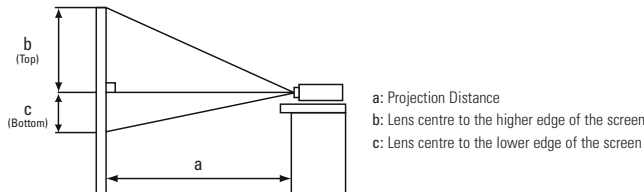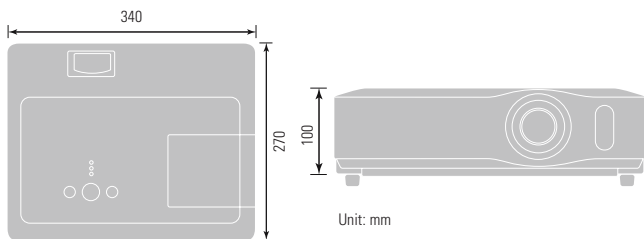

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.2	1.4	55	6
60" (1.5)	1.8	2.1	82	9
100" (2.5)	3.0	3.6	137	15
150" (3.8)	4.5	5.4	206	23
200" (5.1)	6.0	7.2	274	30
300" (7.6)	9.0	10.8	411	46

ED-X30/ED-X32 Technical Specifications

OPTICAL

LCD Panel	0.63" P-Si TFT x 3
Resolution	XGA: 1024 x 768 lines
Brightness	Normal Mode 1500 ANSI Lumens Bright Mode 2000 ANSI Lumens
Contrast Ratio	500:1
Lens	F1.7-1.9 (f=18.9-22.6mm) Manual Focus, Manual Zoom x 1.2
Lamp	220W UHB
Lamp Life	2000 (normal)/3000 (whisper)
Projection Distance	0.9 - 10.8M
Distance to Width Ratio (1)	1.5 - 1.7
Diagonal Display Size	30 - 300" (60"@1.8m, Wide)
Number of Colour	8 Bit/colour, 16.7M colours
Keystone	9:1 upward shift, fixed

COMPATIBILITY

Computer Compatibility	IBM Compatible VGA, SVGA, XGA, SXGA, UXGA Capability, MAC 16" (Pixelworks chip)
Video Compatibility	NTSC/PAL/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p (720p@60Hz), 1125i(1080i@50/60Hz)
Plug & Play	DDC2B
Frequency Range	FV 56-120Hz, FH 31.5-106kHz

FEATURES

Audio Output	7.0W x 1
Other	Freeze, Magnifying, Blank, Auto adjustment, Search, Page UP&DOWN (for USB mouse function), Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction, Auto V keystone +/- 30 degrees (@XGA 60Hz), MyScreen, My Memory, My Button, blackboard/whiteboard mode, Day Time mode, input source naming (english), resolution setting, Easy Lamp replace from Top, Air Filter on side, Serial Number label on side, Quick ON (6 sec target), Direct ON, Direct Off, Security Bar, PIN Lock, MyScreen PIN lock, Keypad Lock, Kensington slot, Transition Detector MENU: 17 Language
OSD Languages	17 Language

CONNECTIONS

Computer Input	15-pin Mini D-sub x 2
Computer Output	15-pin Mini D-sub x 1
Video Input	RCA Jack x 1 S-Video Jack x 1
Audio Input	RCA Jack x 3 for Component Stereo Mini Jack x 2 RCA (L/R) x 1 pair (Selectable on OSD)
Audio Output	Stereo Mini Jack x 1
Control and Mouse	9-pin D-sub x 1 for RS232 control USB type B x 1 for mouse control

POWER

Power Supply	100-120V/220-240V, auto switching
Power Consumption	320W

PHYSICAL

Dimensions (W x H x D)	340 x 100 x 270mm (excluding feet and extrusions)
Weight	3.5kg
Noise Level	35dB (Normal Mode)/29dB (Whisper Mode)
Air Filter	MU04951

MISCELLANEOUS

Lamp indicator light, Power light, Ceiling Mount image, Rear Projection Image

CERTIFICATION

UL60950/C-UL, FCC Part 15 Class B, CE, AS/NZS CISPR22 Class B

ACCESSORIES SUPPLIED

Remote Control with batteries, Computer Cable, Power Cord, User Manual (detail & concise), Lens Cap (& strap), Security Label, AV cable

OPTIONAL ACCESSORIES

Replacement Lamp	DT00841
Replacement Remote Control	HL02227

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.3	1.5	51	-2
60" (1.5)	1.9	2.3	77	-2
100" (2.5)	3.2	3.9	129	-4
150" (3.8)	4.9	5.8	193	-6
200" (5.1)	6.5	7.8	257	-8
300" (7.6)	9.8	11.7	386	-12

HITACHI DIGITAL MEDIA, Hitachi Europe Ltd, Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire SL6 8YA UNITED KINGDOM
Tel: +44 (0)1628 585 000 Fax: +44 (0)1628 585 500 www.hitachidigitalmedia.com

The specification above and photography is for reference only and may be subject to change.